



Webbing Edge Shade Sail with Bottlescrew Tensioner

Please ensure the correct procedure is followed as directed below.

Step 1 | Unwind tensioners 3/4 of the way out and attach to the cover. * Ensure anti seize is applied to thread of the bottle screw

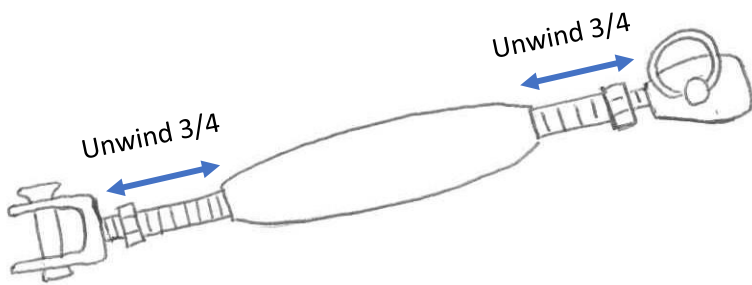


Step 2 | Orientate your sail and attach 1 point to the first post and work your way around the cover attaching the tensioners but not tightening. The sail will need to be stretched to reach each point.

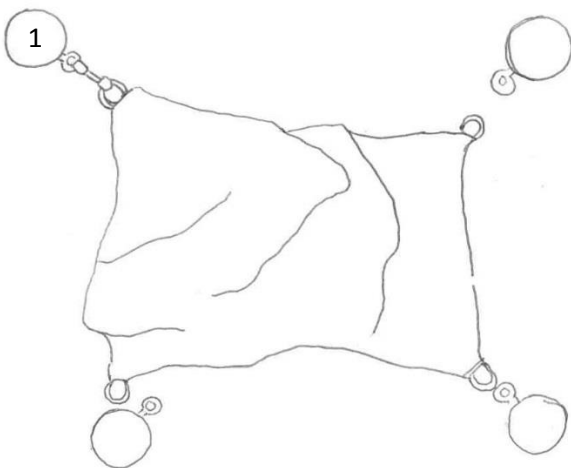


Note: The cover will be tight, but it has been made to suit the fittings provided. Use rope to help stretch points to the posts.

Step 3 | Once in place; tighten tensioners until cover is tight.

Note: The bottle screws won't necessarily be done all the way up when tight.

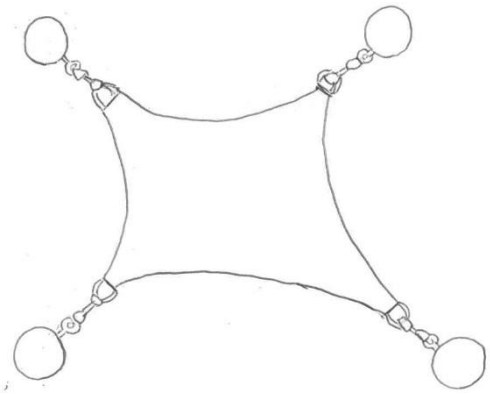

Step 4 | Tighten lock nuts into the middle against the bottle.

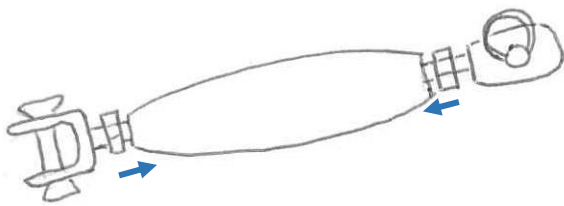

A shade cover may flap Gently in the breeze but should be tight enough to avoid sever shock loading of points and/or fittings

Wire Edge Shade Sail with Bottlescrew or Togglebolt Tensioner

Step 1 | Loosen bulldog clamps from around the wire



Step 2 | Unwind tensioners all the way out and attach to the cover. Apply anti seize to thread of bottle screw.

Note: If using a toggle bolt, ensure you put a brass nut on first. The stainless nut is a lock nut, keep aside until later.





Step 3 | Attach tensioners to posts/ roof mounts.

Note: If using a toggle bolt, bend the split pin as shown in the photo to ensure the pin doesn't fall out.



Step 4 | Tighten wire by hand until it is as tight as possible, then tighten the bulldog clamps suitably around the wire

Step 5 | Tighten tensioners until the cover is tight. Once tight set the lock nuts in place.

Note: When the cover is tight the tensioners won't necessarily be done all the way up.

A waterproof cover should be "drum tight".

